




ELS400
REVISION: G
EFFECTIVE: 9/2026

ELS[®]-400[™]

ELEVATOR EMERGENCY LIGHTING SYSTEM

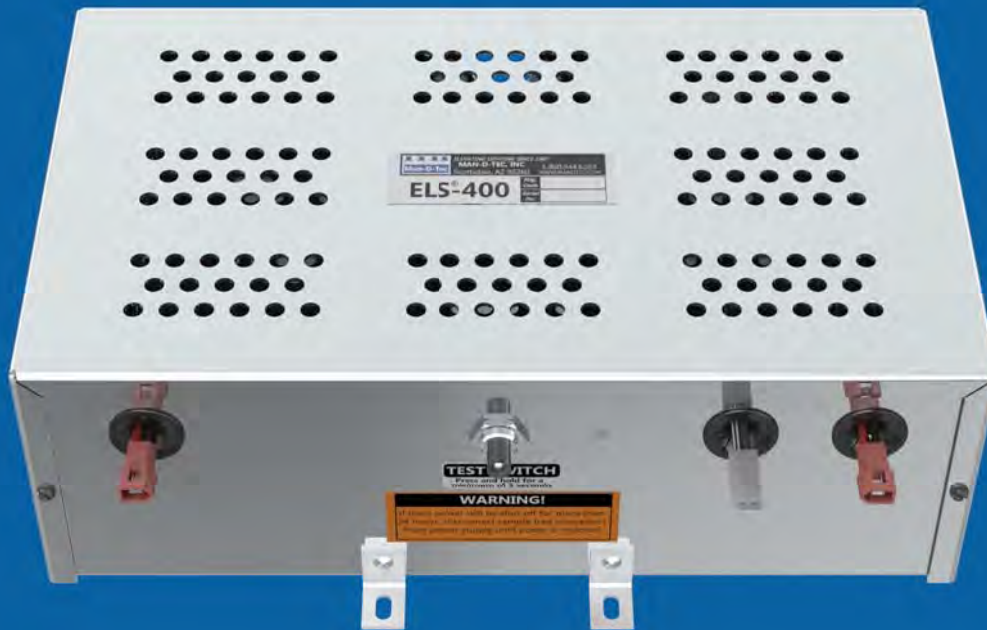

ELS-400 by Man-D-Tec[®]

UNIQUE, EMERGENCY LIGHTING SYSTEM, DESIGNED SPECIFICALLY FOR ELEVATOR APPLICATIONS.

The ELS-400 is perfect for codes or specifications requiring the same lamp to provide normal and emergency lighting. This 6 volt unit powers two (2) Man-D-Tec low voltage incandescent Minilite[®] (M-DL[™]) or two (2) halogen (H-DL[™]) fixtures during a normal power outage.

Contains the following features:

- 1) Pre-harnessed to plug directly into our halogen (H-DL[™]) and incandescent Minilite[®] (M-DL[™]) systems.
- 2) Simple plug and play installation.
- 3) Exceeds A17.3 4-hour runtime code requirement for emergency lighting.

Product Specifications on the back of page.



For NEMA APPLICATION emergency lighting, see model **"ELS-200-N4[™]"** along with the **XP LITE-N4[™]** primary cab lighting and the **MVS[®]-HAZLOC[™]** ventilation system.



44BD
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545

1.800.944.6263
WWW.MANDTEC.COM

For Use With:

MAN-D-TEC HALOGEN (H-DL[™])**20 watt Man-D-Tec halogen systems****MAN-D-TEC MINILITE[®] (M-DL[™])****20 watt Man-D-Tec incandescent systems****H-DL Halogen****M-DL Minilite**

(fixtures shown for example and not included)

Power Supply
(ELS-400)448D
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545**BOX MATERIAL** .060 Aluminum**DIMENSIONS**

12"	Overall Length
7"	Overall Width
4"	Overall Height

CHARGER (2)**Automatic**

Maintains peak battery condition

BATTERY (2)**High Capacity, Sealed, 6 volt, Maintenance-Free, Long Life** (Part # B-3/4, incl.)
Exceeds A17.3 4-hour runtime code requirement for emergency lighting**INPUT**

Line Voltage (115 VAC)

OUTPUT

Included Batteries (6 VDC)

TEST SWITCH

Verifies system function

INCLUDED

ELS-400 power supply: batteries, chargers, pre-wired for plug and play

Features

Pre-harnessed to plug directly into the downlighting system**Meets architectural requirements calling for the same lamp to provide normal and emergency lighting.****Powers (2) two H-DL Halogen or (2) two M-DL Minilite 20 watt lighting fixtures**Alarm Bell
(Optional)**ESA-1[™] (6 VDC)**

The ELS-400 Emergency Lighting System is provided with alarm terminals. The optional ESA-1 is a loud gong style bell, providing up to 95dB(A). Please specify this option when ordering.

For NEMA APPLICATION emergency lighting, see model **"ELS-200-N4[™]"** along with the **XP LITE-N4[™]** primary cab lighting and the **MVS[®]-HAZLOC[™]** ventilation system.**MAN-D-TEC, INC.**8175 E. PARADISE LANE
SCOTTSDALE, AZ 85260**P.** 480.998.0325**F.** 480.998.0318**1.800.944.6263**

WWW.MANDTEC.COM